TO:

FROM: 烨新达技术部

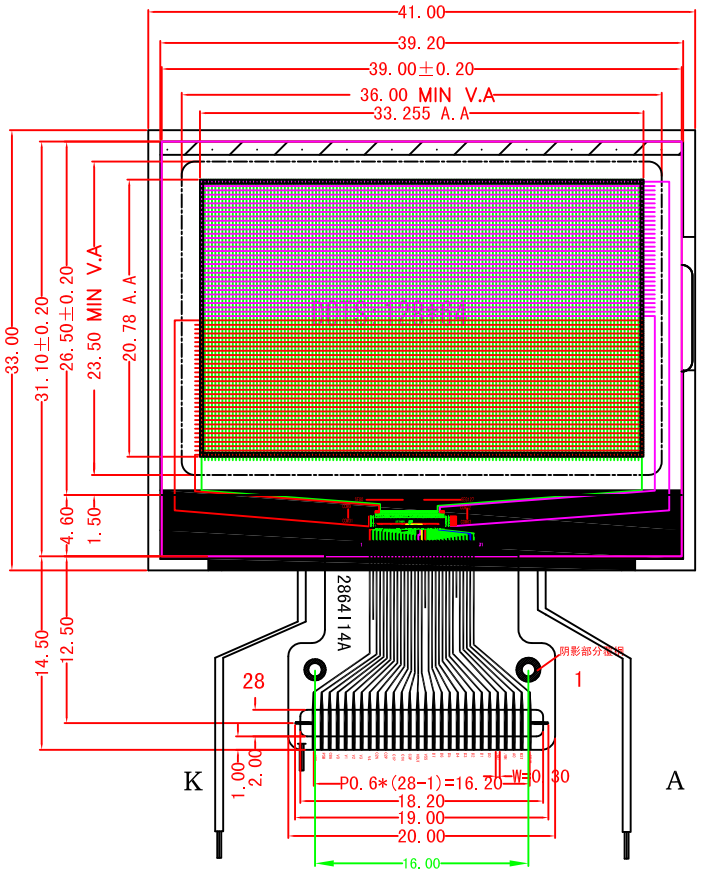

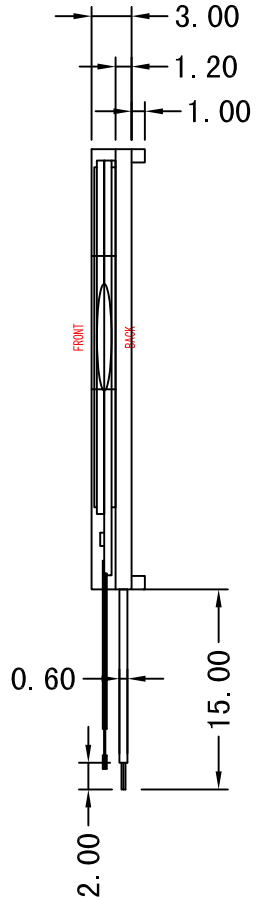

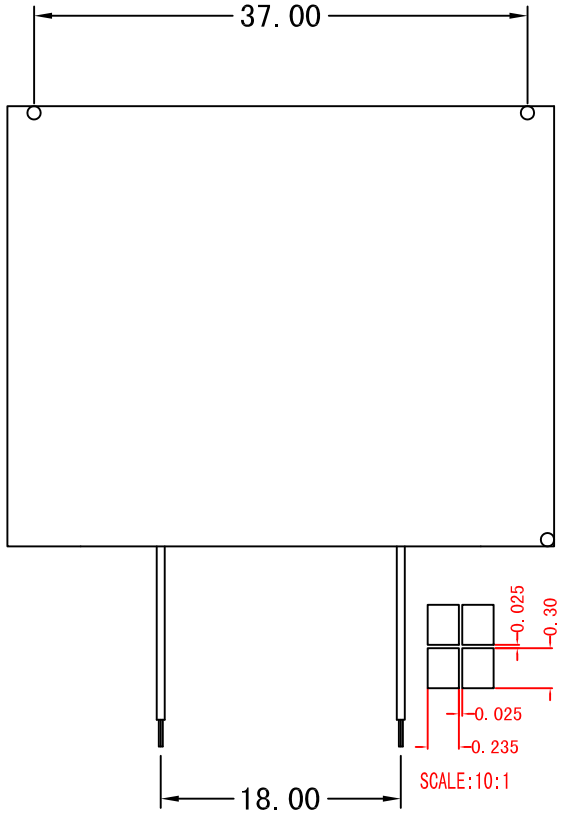

PIN	SYMBOL
1	CS1B
2	RST
3	A0
4	/WR
5	/RD
6	D0
7	D1
8	D2
9	D3
10	D4
11	D5
12	D6
13	D7
14	VSS
15	VOUT
16	C3P
17	C1N
18	C1P
19	C2P
20	C2N
21	V4
22	V3
23	V2
24	V1
25	V0
26	C86
27	PSB
28	VDD

LCD-FSTN

VIEW ANGLE: 6 O'CLOCK	DISPLAY MODE: HIGH-TRANSFLECTIVE	REVISION RECORD	SHENZHEN YEXINDA INDUSTRY CO., LTD.
DRIVE MODE: 1/64D,1/9B	OPERATE TEMP: -20°C TO +70°C	1:	DRAWN BY: HGY / LCM NO: YXD-12864I14A
DRIVE VOLAGE: 9V	STORAGE TEMP: -30°C TO +80°C	2:	APPROVED: / UNIT: mm
THE LCM: FPC+COG IC+LCD	DRIVING IC: 7565R	3:	DATE: 2013-06-27 / SHEET NO: 2 OF 2

REV A