



1.0 DIMENSIONAL DRAWING

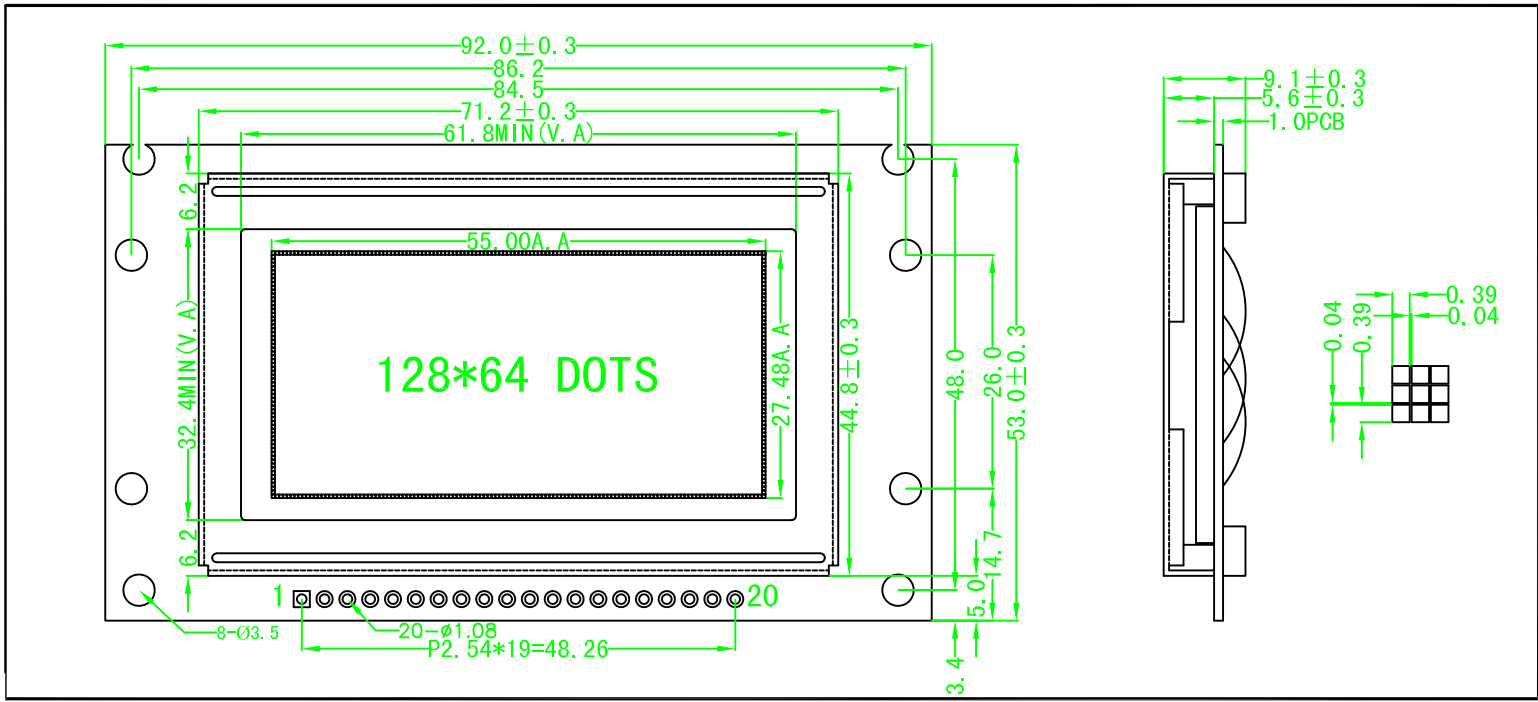

2.0 BLOCK DIAGRAM & POWER SUPPLY

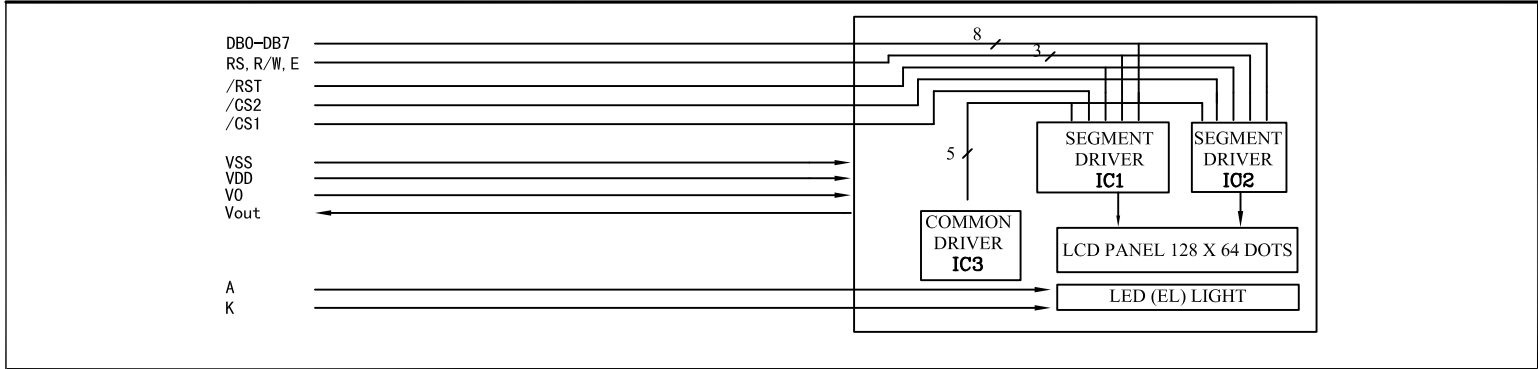

3.0 MECHANICAL SPECIFICATIONS & FEATURE

Item	Nominal Dimensions (mm)	Feature	
		LCD Type	STN
Module Size (W*H*T)	92.0 × 53.0 × 9.1	LCD Coloure	Yellow-green
View Area (W*H)	61.8 × 32.4	View Angle	6 0' clock
Dot × Dot (W*H)	128 × 64	Display Type	Positive Type
Dot Pitch (W*H)	0.43 × 0.43	Rear Polarizer	Transflective
Dot Size (W*H)	0.39 × 0.39	Operating Temperature	-28° C to +75° C
---	---	Storage Temperature	-40° C to +80° C
---	---	Backlight	LED (green)

4.0 ELECTRICAL CHARACTERISTICS

Item	Symbol	Test Condition	Min.	Typ.	Min.	Unit
Operating Voltage	Vdd	Ta=25° C	---	5.0	---	V
Operating Voltage For LCD	Vlcd	Ta=25° C	---	9.0	---	V
Supply Current	Idd	Ta=25° C, Vdd=3.0V	---	15	---	μA
Supply Current For Backlight	If	Ta=25° C, VAK=3.0V	---	15	---	mA

5.0 INTERFACE PIN CONNECTIONS

Pin No.	Symbol	Level	Description
1	VDD	5.0V	LCM Power Supply Positive Input Terminal
2	VSS	0V	LCM Power Supply Negative Input Terminal
3	V0	---	LCD Driving Voltage Input Terminal
4-11	DB0-DB7	TRI-STATE	LCM 8-bits Data Input Terminal
12	/CS1	L	Left-half Panel Selection Signal Input Terminal
13	/CS2	H	Right-half Panel Selection Signal Input Terminal
14	/RES	H→L, H	LCM Reset Signal Input Terminal
15	R/W	H/L	LCM Read/Write Signal Input Terminal
16	RS	H/L	LCM Comand/data Input Terminal
17	E	H, L, F	LCM Enable Signal Input Terminal
18	VOU	---	LCM Negative Power Supply Negative Output Terminal
19	A	5.0V	LED Backlight Power Supply Positive Input Terminal
20	K	0V	LED Backlight Power Supply Negative Input Terminal