



1.0 DIMENSIONAL DRAWING

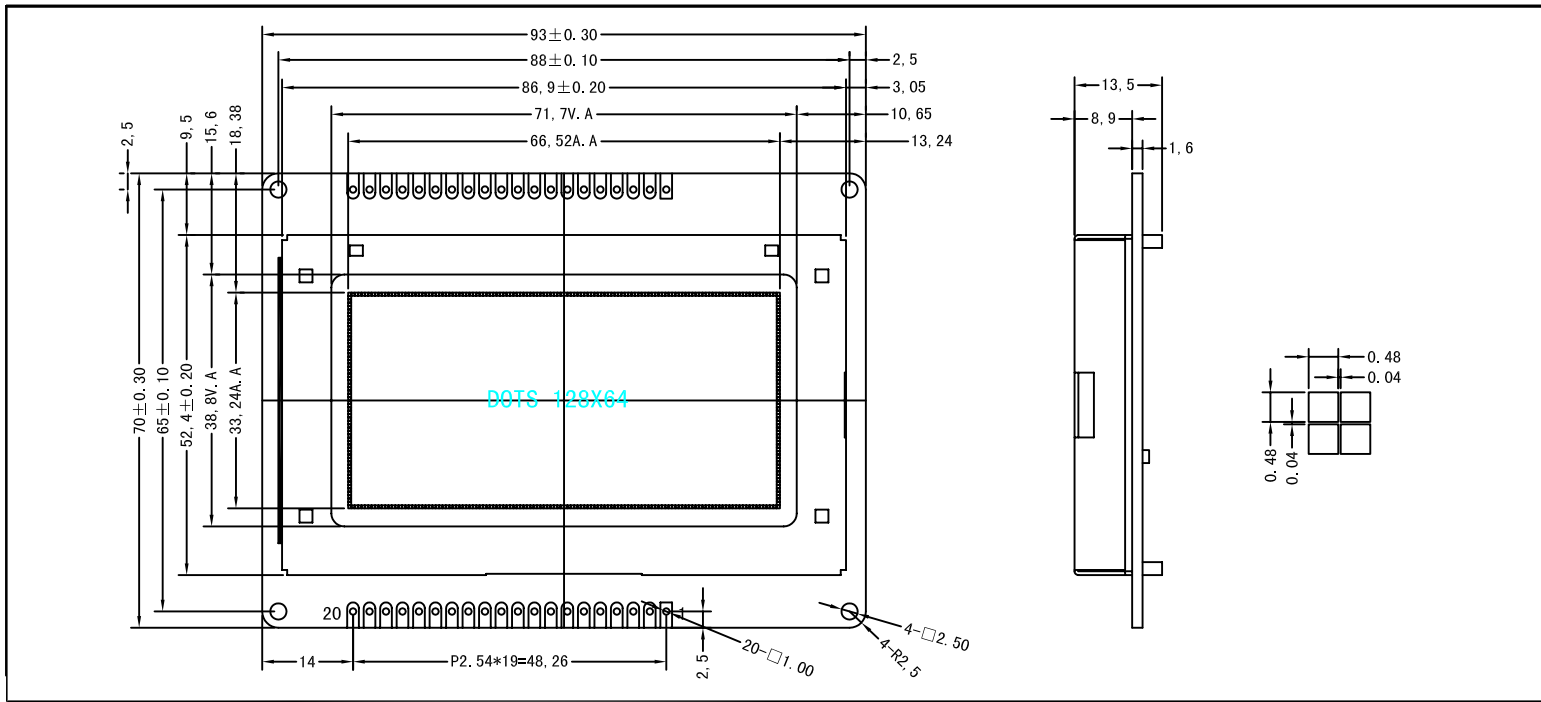

2.0 BLOCK DIAGRAM & POWER SUPPLY

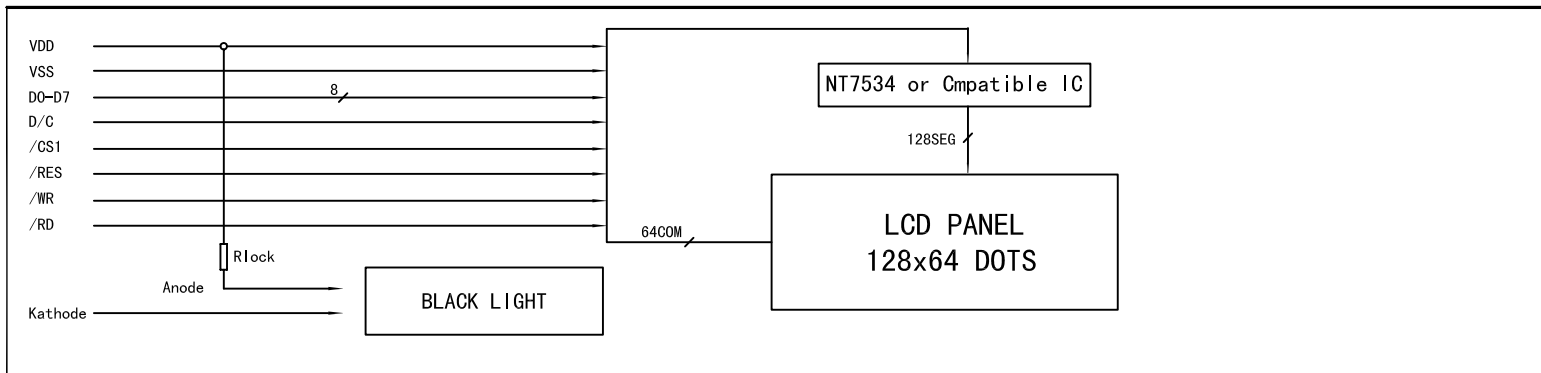

3.0 MECHANICAL SPECIFICATIONS & FEATURE

Item	Nominal Dimensions (mm)	Feature	
		LCD Type	STN, Anti U.V
Module Size (W*H*T)	93.0×70.0×13.5	LCD Coloure	Yellow-green
View Area (W*H)	71.7 × 38.8	View Angle	6 0'clock
Dot × Dot (W*H)	128 × 64	Display Type	Positive Type
Dot Pitch (W*H)	0.52 × 0.52	Rear Polarizer	Transmissive
Dot Size (W*H)	0.48 × 0.48	Operating Temperature	-15° C to +65° C
---	---	Storage Temperature	-20° C to +70° C
---	---	Backlight	LED (green)

4.0 ELECTRICAL CHARACTERISTICS

Item	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Operating Voltage	Vdd	Ta=25° C	---	5.0	---	V
Operating Voltage For LCD	Vlcd	Ta=25° C	---	9.0	---	V
Supply Current	Idd	Ta=25° C, Vdd=3.0V	---	15	---	μA
Supply Current For Backlight	If	Ta=25° C, VAK=3.0V	---	15	---	mA

5.0 INTERFACE PIN CONNECTIONS

Pin No.	Symbol	Level	Description
1	VSS	0V	LCM Power Supply Negative Input Terminal
2	VDD	5.0V	LCM Power Supply Positive Input Terminal
3	NC		
4	D/C	H/L	LCM Data/command Signal Input Terminal
5	R/W	L	LCM Read/Write Signal Input Terminal
6	E	H _L F	LCM Enable Signal Input Terminal
7-14	D0-D7	TRI-STATE	LCM 8-bits Data Input Terminal
15-16	NC		
17	/RES	H→L, H	LCM Reset Signal Input Terminal
18	VSS	0V	LCM Power Supply Negative Input Terminal
19	A	5.0V	LED Backlight Power Supply Negative Input Terminal
20	VSS	0V	LCM Power Supply Negative Input Terminal