


FROM: 烨新达技术部

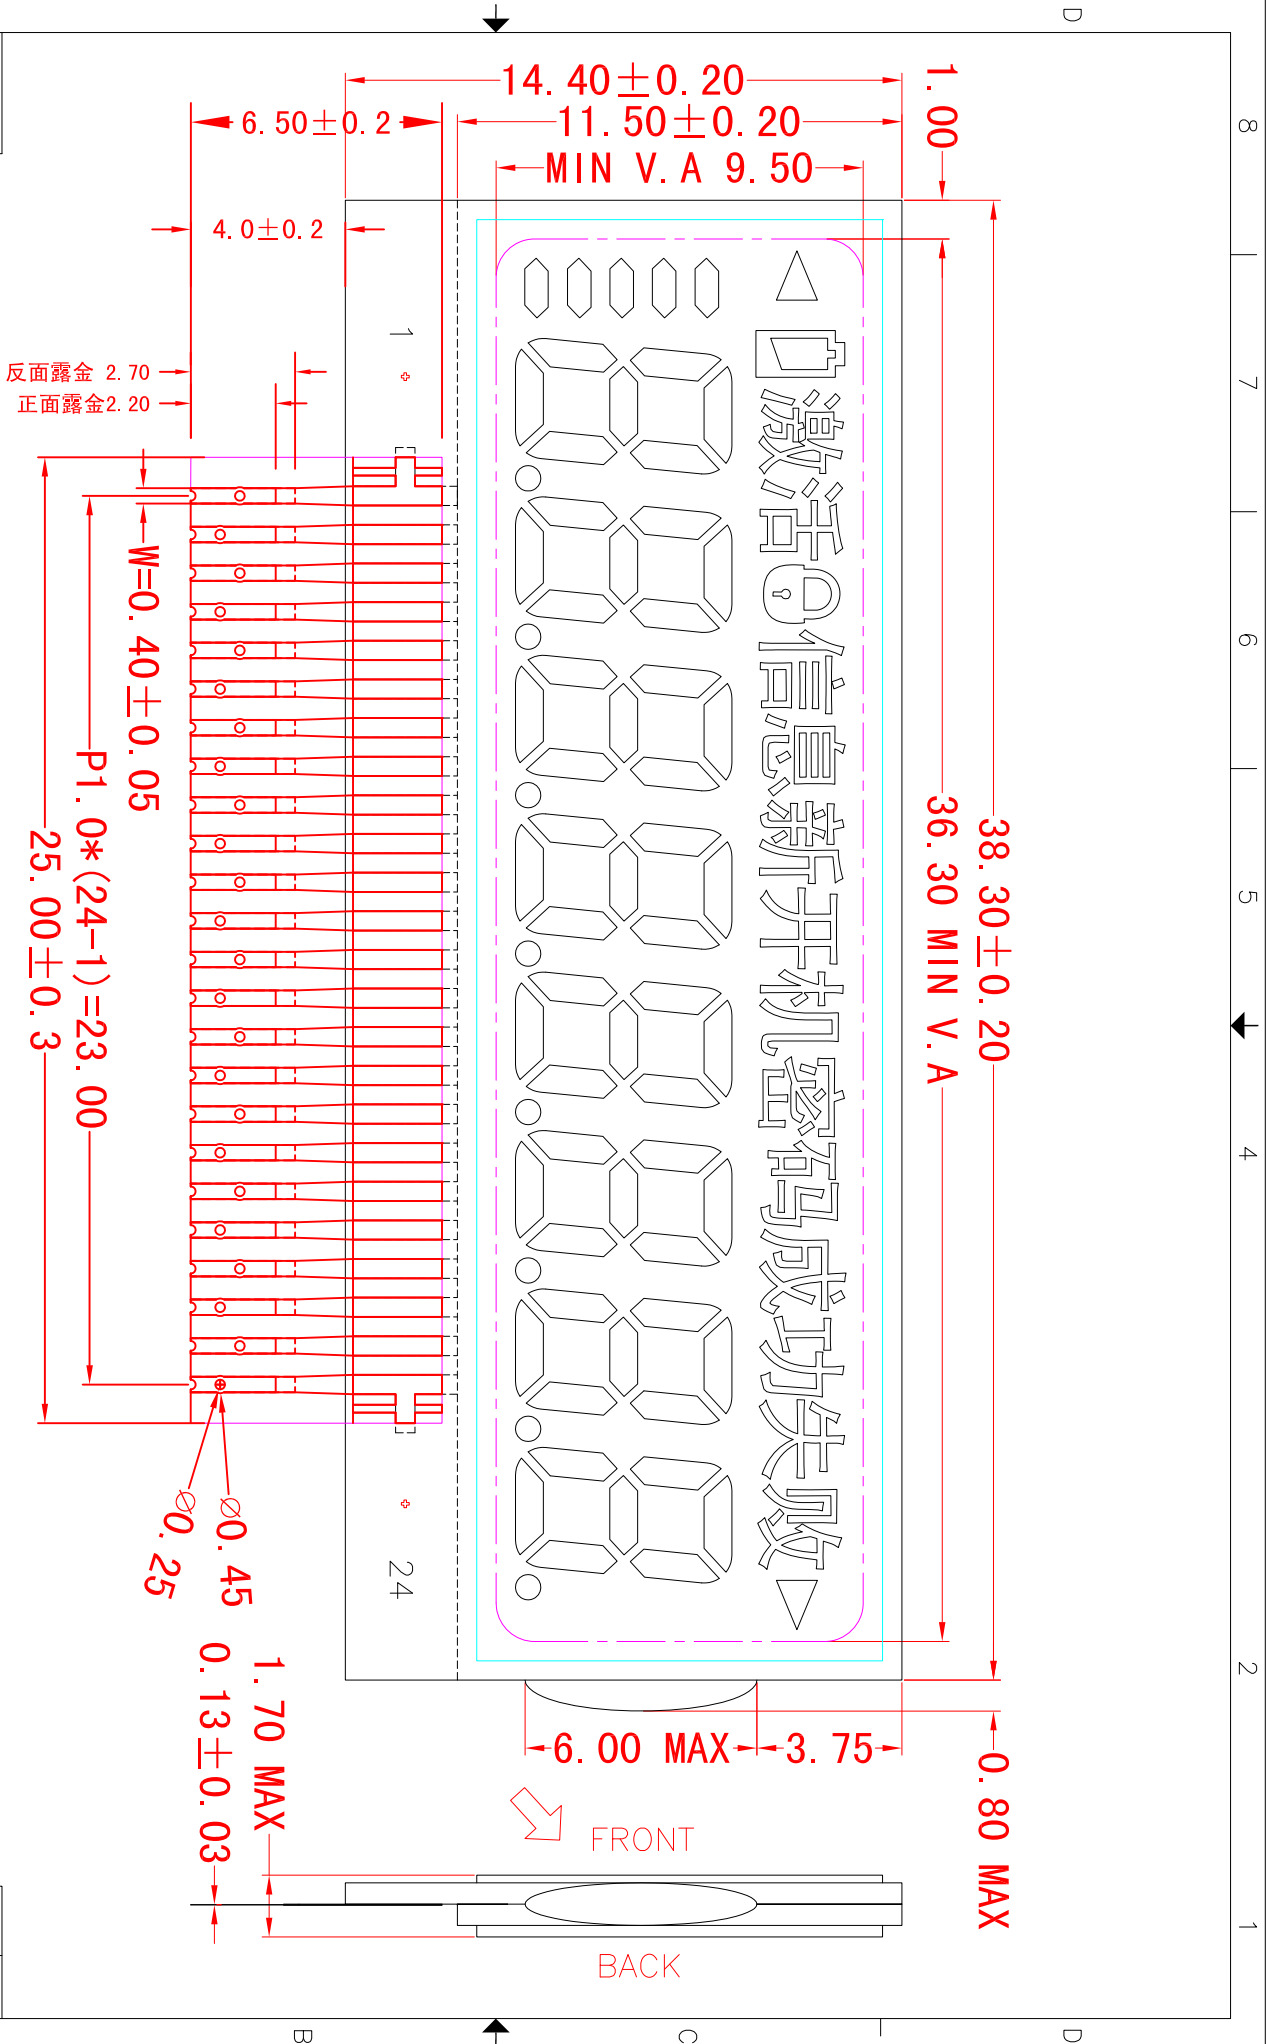

LCD-TN

VIEW ANGLE: 6 O'CLOCK	DISPLAY MODE: POSITIVE/REFLECTIVE
DRIVE MODE: 1/4D,1/3B	OPERATE TEMP: -10°C T0 +60°C
DRIVE VOLTAGE: 3.0V	STORAGE TEMP: -20°C T0 +70°C
CONNECTOR: Pin	IC:

REVISION RECORD


1:	
2:	
3:	

SHENZHEN YEXINDA INDUSTRY CO., LTD.

DRAWN BY: HGY	LCD NO: YXD-LCDT0064
APPROVED:	UNIT: mm
DATE: 2013-05-08	SHEET NO: 1 OF 2

REV A

PIN	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24
COM1	L1	H4	K1	K2	1F	1A	2F	2A	3F	3A	4F	4A	5F	5A	6F	6A	7F	7A	8F	8A	---	---	---	COM1
COM2	L2	H3	H5	K3	1G	1B	2G	2B	3G	3B	4G	4B	5G	5B	6G	6B	7G	7B	8G	8B	---	---	---	COM2
COM3	L3	H2	H6	K4	1E	1C	2E	2C	3E	3C	4E	4C	5E	5C	6E	6C	7E	7C	8E	8C	---	---	---	---
COM4	L4	H1	H7	K5	1D	P1	2D	P2	3D	P3	4D	P4	5D	P5	6D	P6	7D	P7	8D	P8	COM4	---	---	---

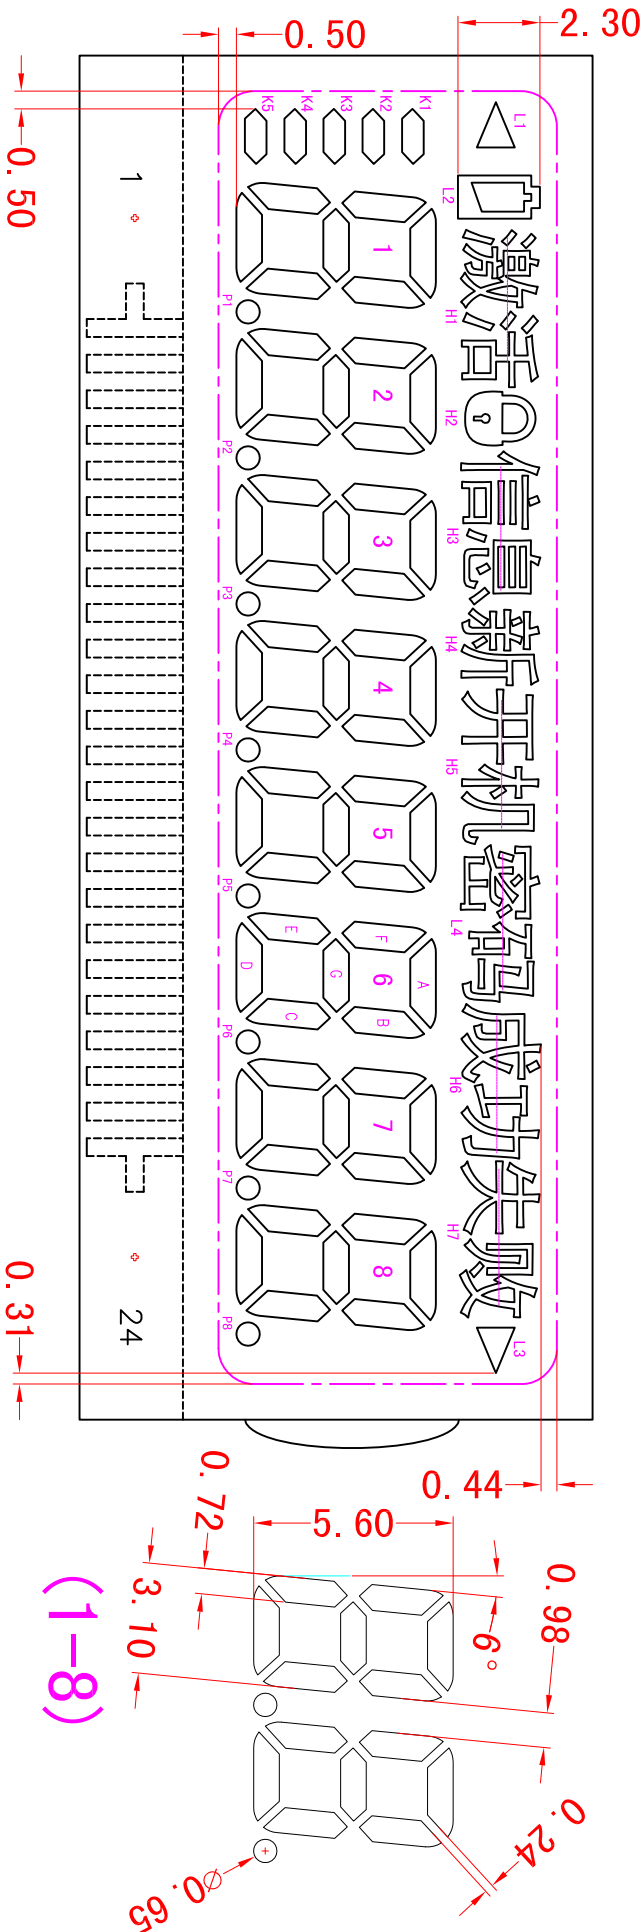

LCD-TN	
VIEW ANGLE: 6 O'CLOCK	DISPLAY MODE: POSITIVE/REFLECTIVE
DRIVE MODE: 1/4D,1/3B	OPERATE TEMP: -10°C T0 +60°C
DRIVE VOLTAGE: 3.0V	STORAGE TEMP: -20°C T0 +70°C
CONNECTOR: Pin	IC:

REVISION RECORD	
1:	
2:	
3:	

SHENZHEN YEXINDA INDUSTRY CO., LTD.	
DRAWN BY: HGY	LCD NO: YXD-LCDT0064
APPROVED:	UNIT: mm
DATE: 2013-05-08	SHEET NO: 2 OF 2

REV A

A

B

C

D

8

7

6

5

4

3

2

1